


## B2006

# JOCKEY WHEEL MAST

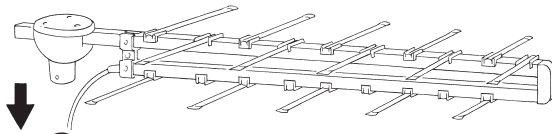


### EASY TO FIT INSTRUCTIONS

This pack contains a Jockey Wheel Mast. Should you have any difficulty assembling or installing your Maxview Jockey Wheel Mast, please contact our Customer Helpline on (01553) 811000.

For the best quality installation, we recommend the use of good quality screened tape and braid coaxial cable. Please retain instructions for future reference. Read all instructions and safety warnings before commencing work.

### CONTENTS OF PACK

- A - Bottom mast section
- B - Extension mast section
- C - Extension mast section
- D - Extension mast section
- E - Top mast section
- F - 2 Clamp mounting booms
- G - 2 Jockey wheel clamp brackets
- H - 2 Mast 'V' bolt & wing nuts
- I - 2 Jockey wheel 'V' bolt & wing nuts

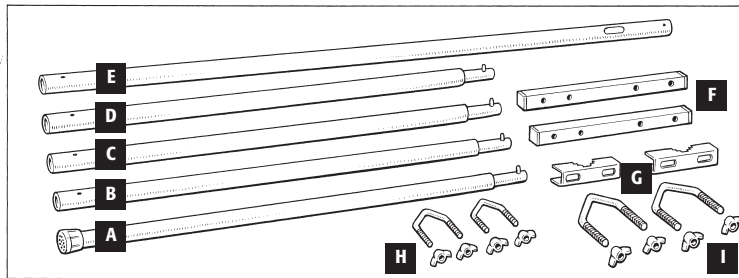

### GUIDELINES FOR BEST RECEPTION

- Choose a site position where the aerial can be mounted as high as possible with a clear line of sight pointing in the direction of the transmitter with no obstructions eg. Trees, buildings blocking the view.
- TV pictures will improve with height and the less obstruction between the aerial and the transmitter the better.
- To route the cable from the aerial to the TV inside the vehicle, the use of a weatherproof socket is recommended.
- For the best interference free reception, do not run coaxial cable in parallel with electrical or other power cables.
- The quality of picture may be improved by fitting a signal booster.

### SAFETY WARNING

- Always follow manufacturer's operating and safety instructions when using tools and/or equipment.
- To avoid injury always route cables and wiring carefully.

