

MAGNETIC FIXING BASE

for Omnimax TV Antenna


SUITABLE FOR FIXING TO ANY STEEL SURFACE

How to fit your Maxview Magnetic Fixing Base

1. Detach the Omnimax Antenna from its base. Remove the inverted 'U' section in the base to allow the cable to exit from the antenna.
2. Fix the antenna base to the Magnetic Fixing Base by screwing the three threaded bolts supplied into the tapered holes in the Magnetic Base. Don't forget to fit the gasket supplied between antenna base and Magnetic Base (refer to Omnimax instructions).
3. Slide the antenna back onto its base and the assembly is ready to be fitted to any flat steel surface on your vehicle or vessel.

The Magnetic Fixing Base can be left in position while travelling within legal speed limits.

Caution: If the aerial and/or base is left attached to your vehicle while on the move, it could become dislodged by low overhanging branches or protruding objects.

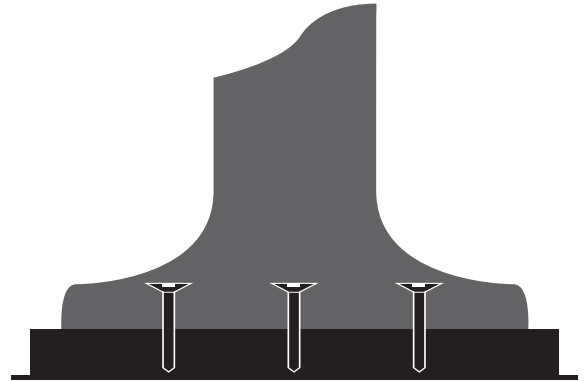

MAXVIEW LIMITED
SETCHEY, KING'S LYNN
NORFOLK, PE33 0AT, ENGLAND
CUSTOMER HELPLINE
(01553) 811000
e-mail: cust_serv@maxview.ltd.uk
website: www.maxview.ltd.uk

Maxview reserve the right to change specifications without prior notice.

911268 Iss 1

MAGNETIC FIXING BASE

for Omnimax TV Antenna


SUITABLE FOR FIXING TO ANY STEEL SURFACE

How to fit your Maxview Magnetic Fixing Base

1. Detach the Omnimax Antenna from its base. Remove the inverted 'U' section in the base to allow the cable to exit from the antenna.
2. Fix the antenna base to the Magnetic Fixing Base by screwing the three threaded bolts supplied into the tapered holes in the Magnetic Base. Don't forget to fit the gasket supplied between antenna base and Magnetic Base (refer to Omnimax instructions).
3. Slide the antenna back onto its base and the assembly is ready to be fitted to any flat steel surface on your vehicle or vessel.

The Magnetic Fixing Base can be left in position while travelling within legal speed limits.

Caution: If the aerial and/or base is left attached to your vehicle while on the move, it could become dislodged by low overhanging branches or protruding objects.

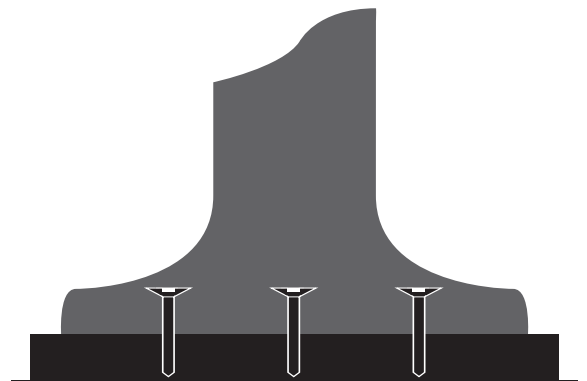

MAXVIEW LIMITED
SETCHEY, KING'S LYNN
NORFOLK, PE33 0AT, ENGLAND
CUSTOMER HELPLINE
(01553) 811000
e-mail: cust_serv@maxview.ltd.uk
website: www.maxview.ltd.uk

Maxview reserve the right to change specifications without prior notice.

911268 Iss 1